



# GUARDSMAN II

TEMPUTECH, INC.

**Active Alarm Testing**

**Secure Testing Feature**

**NEMA Enclosure**

**Highly Visible Display**

## Specifications:

Programmable set-up

Factory set to current  
OSHA requirements

NEMA 12-13 Enclosure

NEMA 14R Enclosure  
(Optional)

Monitoring range 0 to  
4000 RPMs

Over Speed & Under  
Speed Alarm functions

Utilizes Single or  
Multiple target sensors

Secure key controlled  
test mode

Works in stand alone  
or networked  
environment

Dimensions\* (H x W x  
D) 10.75" x 8.5" x 4.5"


\*Basic NEMA  
Enclosure

TempuTech is a  
Value Added  
Strategy Provider



Guardsman II motion monitoring system was designed to meet today's challenges. A secure key controlled test function and the highly visible NEMA 4 rated display allows the operator to quickly and easily monitor and test the system. The Guardsman II is capable of providing the operator with both visual and audio alarm sequences.

TempuTech, Inc. has met the industry needs. The Guardsman II provides front panel active alarm testing and is built into a NEMA 12-13 enclosure, an optional NEMA 4R enclosure is available for outdoor and rugged environmental installations. Guardsman II can be installed into existing customer locations utilizing single or multiple target sensors.

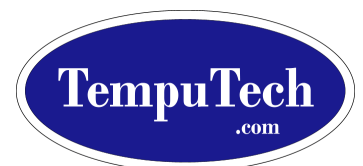

662-838-3698